




## BEARINGS(UK)LTD.

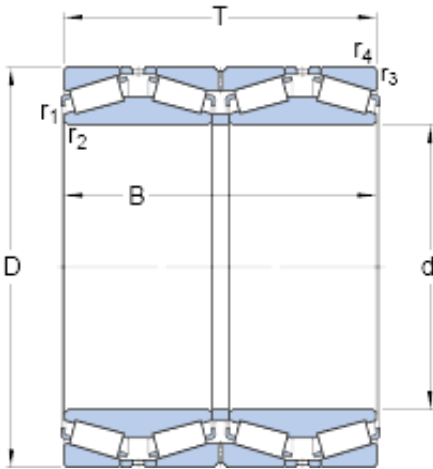

BT4B 328773 G/HA1 Bearing 2D drawings and 3D CAD models

482.6 mm x 630 mm x 420 mm skf BT4B 328773  
G/HA1 Four-row tapered roller bearings, TQO  
design

Bearing No. BT4B 328773 G/HA1

Size	420x482.6x420 mm
Bore Diameter	420 mm
Outer Diameter	482,6 mm
Width	420 mm
d	482.6 mm
B	420 mm
T	420 mm
$r_{1,2}$ - min.	3.3 mm
Basic dynamic load rating - C	6600 kN
Basic static load rating - $C_0$	19300 kN
Fatigue load limit - $P_u$	1400 kN
Comparative radial load rating - $C_F$	1760 kN
Comparative axial load rating - $C_{Fa}$	284 kN
Thrust factor - K	1.76
Calculation factor - e	0.33
Calculation factor - $Y_1$	2
Calculation factor - $Y_2$	3
Calculation factor - $Y_0$	2
Mass bearing	345 kg
Design variant/feature	TQO/GWI
D	630 mm



## BEARINGS(UK)LTD.

$d_1$	506 mm
$D_1$	570 mm
$r_{1,2}$ min.	3.3 mm
$r_{3,4}$ min.	6.4 mm
Basic dynamic load rating C	6600 kN
Basic static load rating $C_0$	19300 kN
Fatigue load limit $P_u$	1400 kN
Comparative radial load rating $C_F$	1760 kN
Comparative axial load rating $C_{Fa}$	284 kN
Thrust factor K	1.76
Calculation factor e	0.33
Calculation factor $Y_1$	2
Calculation factor $Y_2$	3
Calculation factor $Y_0$	2