




BEARINGS(UK)LTD.

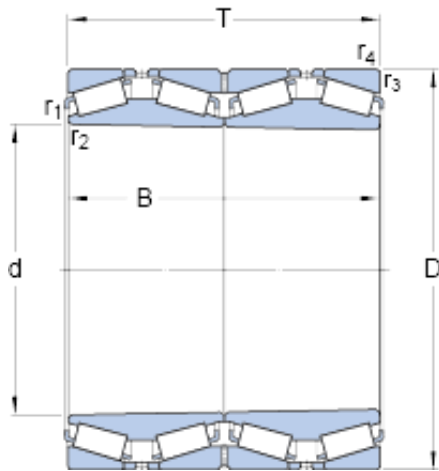

384.175 mm x 546.1 mm x 400.05 mm skf BT4B
334128/HA1 Four-row tapered roller bearings,
TQO design

Bearing No. BT4B 334128/HA1

BT4B 334128/HA1 Bearing 2D drawings and 3D CAD
models

Size	546.1x384.175x400.05 mm
Bore Diameter	546,1 mm
Outer Diameter	384,175 mm
Width	400,05 mm
d	384.175 mm
D	546.1 mm
B	400.05 mm
T	400.05 mm
$r_{1,2}$ - min.	3.3 mm
$r_{3,4}$ - min.	3.3 mm
Basic dynamic load rating - C	6440 kN
Basic static load rating - C_0	16600 kN
Fatigue load limit - P_u	1290 kN
Comparative radial load rating - C_F	1730 kN
Comparative axial load rating - C_{Fa}	278 kN
Thrust factor - K	1.76
Calculation factor - e	0.33
Calculation factor - Y_1	2
Calculation factor - Y_2	3
Calculation factor - Y_0	2
Mass bearing	340 kg



BEARINGS(UK)LTD.

Design variant/feature	TQOT
d_1	418 mm
D_1	484 mm
$r_{1,2}$ min.	3.3 mm
$r_{3,4}$ min.	3.3 mm
Basic dynamic load rating C	6440 kN
Basic static load rating C_0	16600 kN
Fatigue load limit P_u	1290 kN
Comparative radial load rating C_F	1730 kN
Comparative axial load rating C_{Fa}	278 kN
Thrust factor K	1.76
Calculation factor e	0.33
Calculation factor Y_1	2
Calculation factor Y_2	3
Calculation factor Y_0	2