




## BEARINGS(UK)LTD.

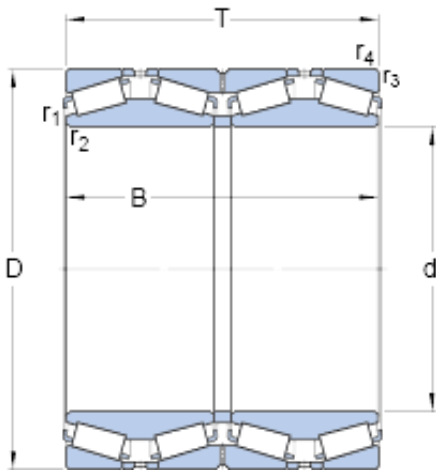

431.8 mm x 571.5 mm x 336.55 mm skf BT4B  
331226 AG/HA1 Four-row tapered roller bearings,  
TQO design

Bearing No. BT4B 331226 AG/HA1

BT4B 331226 AG/HA1 Bearing 2D drawings and 3D  
CAD models

Size	571.5x431.8x336.55 mm
Bore Diameter	571,5 mm
Outer Diameter	431,8 mm
Width	336,55 mm
d	431.8 mm
D	571.5 mm
B	336.55 mm
T	336.55 mm
$r_{1,2}$ - min.	1.5 mm
$r_{3,4}$ - min.	3.3 mm
Basic dynamic load rating - C	4950 kN
Basic static load rating - $C_0$	14000 kN
Fatigue load limit - $P_u$	1060 kN
Comparative radial load rating - $C_F$	1290 kN
Comparative axial load rating - $C_{Fa}$	282 kN
Thrust factor - K	1.33
Calculation factor - e	0.44
Calculation factor - $Y_1$	1.5
Calculation factor - $Y_2$	2.3
Calculation factor - $Y_0$	1.4
Mass bearing	240 kg



## BEARINGS(UK)LTD.

Design variant/feature	TQO/GWI
$d_1$	464 mm
$D_1$	511 mm
$r_{1,2}$ min.	1.5 mm
$r_{3,4}$ min.	3.3 mm
Basic dynamic load rating C	4950 kN
Basic static load rating $C_0$	14000 kN
Fatigue load limit $P_u$	1060 kN
Comparative radial load rating $C_F$	1290 kN
Comparative axial load rating $C_{Fa}$	282 kN
Thrust factor K	1.33
Calculation factor e	0.44
Calculation factor $Y_1$	1.5
Calculation factor $Y_2$	2.3
Calculation factor $Y_0$	1.4