




BEARINGS(UK)LTD.

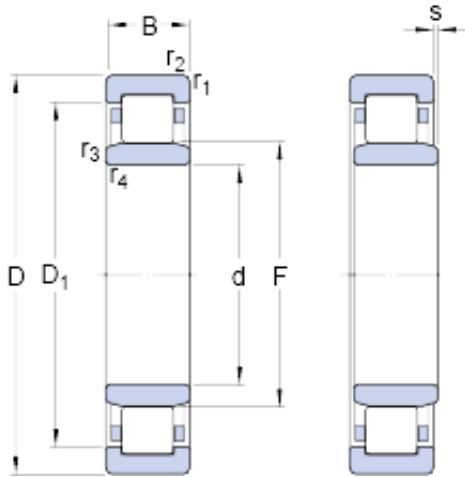

75 mm x 115 mm x 20 mm skf NU 1015
M/C3VL0241 INSOCOAT cylindrical roller
bearings, single row

Bearing No. NU 1015 M/C3VL0241

NU 1015 M/C3VL0241 Bearing 2D drawings and 3D
CAD models

Size	115x75x20 mm
Bore Diameter	115 mm
Outer Diameter	75 mm
Width	20 mm
d	75 mm
D	115 mm
B	20 mm
D ₁	101 mm
F	85 mm
s	3 mm
r _{1,2} - min.	1.1 mm
r _{3,4} - min.	1 mm
d _a - min.	79.6 mm
d _a - max.	83 mm
d _b - min.	87 mm
D _a - min.	105.5 mm
D _a - max.	109 mm
r _a - max.	1 mm
r _b - max.	1 mm
Basic dynamic load rating - C	58.3 kN
Basic static load rating - C ₀	71 kN
Fatigue load limit - P _u	9.3 kN
Reference speed	6700 r/min



BEARINGS(UK)LTD.

Limiting speed	6700 r/min
Calculation factor - k_r	0.1
D_1	101 mm
s max.	3 mm
$r_{1,2}$ min.	1.1 mm
$r_{3,4}$ min.	1 mm
d_a min.	79.6 mm
d_a max.	83 mm
d_b min.	87 mm
D_a min.	105.5 mm
D_a max.	109 mm
r_a max.	1 mm
r_b max.	1 mm
Basic dynamic load rating C	58.3 kN
Basic static load rating C_0	71 kN
Fatigue load limit P_u	9.3 kN
Calculation factor k_r	0.1
Mass bearing	0.75 kg